


ASSEMBLY & INSTALLATION INSTRUCTIONS

B560

Summit Sconce 202045

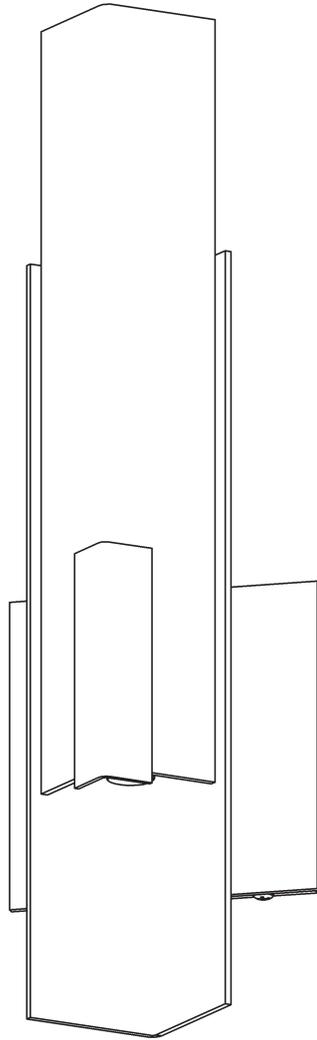

Component Parts

- A Fixture**
- B Mounting Bracket**
- C Ground Screw**
- D Cupped Washer**
- E #8 Screws (4)**
- F Glass**
- G Holder**
- H Screw**
- I Inner Glass (Only Used w/ Clear Outer Glass Option)**
- J O-rings (2) (Only Used w/ Clear Outer Glass Option)**
- K Socket**
- L Bulb (Not Included)**
- M Cap**
- N Nipple**



ASSEMBLY & INSTALLATION INSTRUCTIONS

B560

Summit Sconce 202045

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.

To Install Fixture (Figure 1)

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack the fixture (A) from the carton.
2. Remove mounting bracket (B) from fixture (A).
3. Thread the wires from electrical box through hole in mounting bracket (B) while moving the bracket into position. Place mounting bracket over electrical box and secure with two machine screws (not provided).

Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use.


4. Attach a pigtail lead to the mounting bracket (B) using the ground screw (C) and cupped washer (D).
5. Hold fixture (A) close to wall. Using suitable wire connectors (not provided), connect fixture wires to supply wires (white to white and black to black). Connect all ground wires (bare copper or green to bare copper or green).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

6. Place fixture (A) over mounting bracket (B). Secure with #8 screws (E) on top and bottom of fixture.

Note: Be sure no wires are pinched between fixture and wall


7. Follow steps on following page to complete installation.

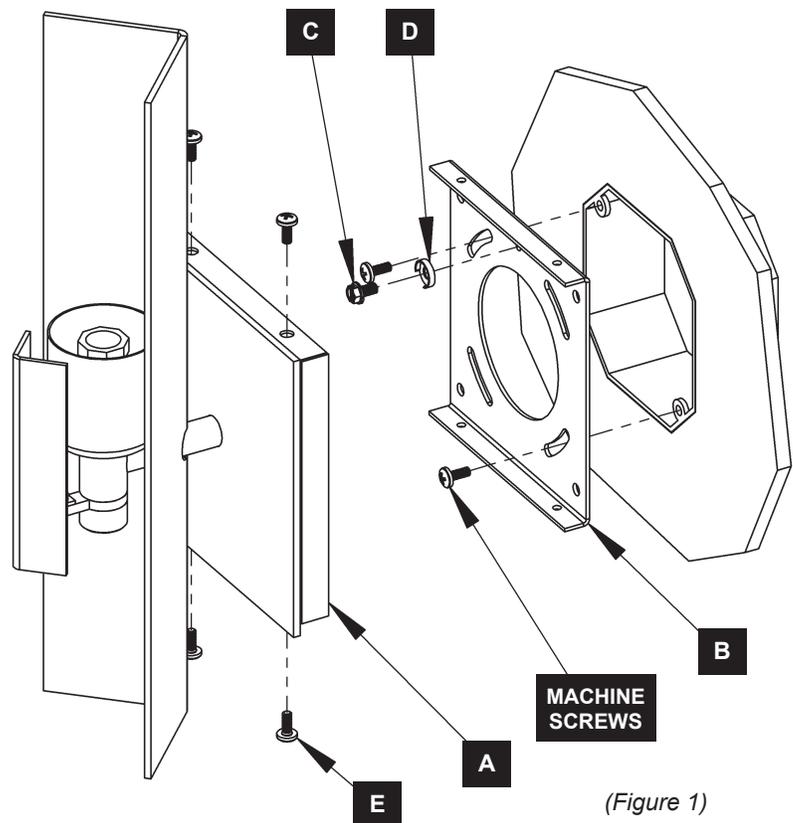

Summit Sconce 202045

To Assemble Glass (Figure 2)

1. Carefully unpack glass (F).
2. Loosen screw (H). it is not necessary to completely remove it.
3. Slide glass (F) in between front bent plate and holder (G).
4. Position glass (F), press holder (G) up against glass (F) and tighten screw (H) to secure.
5. Follow steps on next page to complete installation.

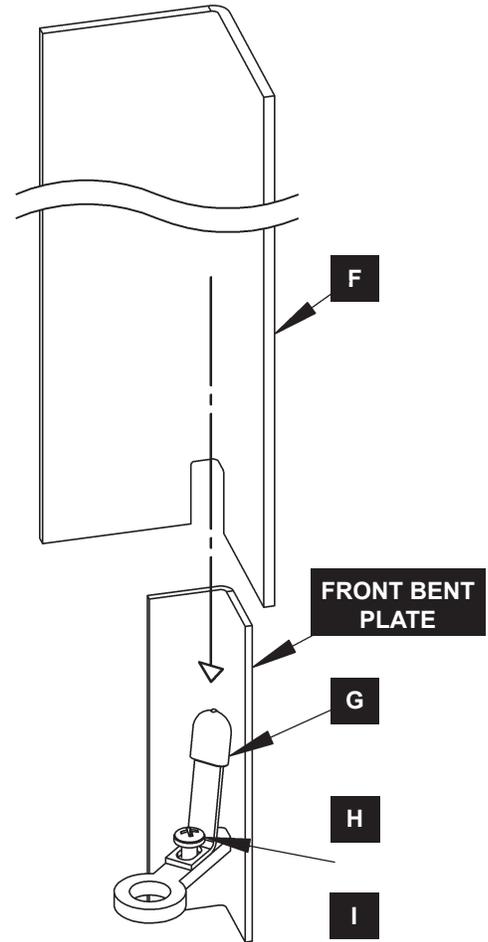

(Figure 2)




Summit Sconce 202045

To Complete Install *(Figure 3)*

1. Install bulbs (L), not included, into sockets (K) .
2. If using clear glass (F), follow next steps. If using frosted glass (F), skip to step 6.
3. Carefully unpack inner glass (I).

NOTE: O-rings are optional. Either use one, two, or none depending on what's needed to help with gaps. Be sure o-rings slide into cup. It may be necessary to rotate glass or push on O-rings to allow them to slide into cup evenly.

4. If needed, slip o-rings (J) onto end of inner glass (I).
5. Slip over bulb (L) and slide into cup.
6. Place glass (F) assembly over nipple (N) in coupling. Thread cap (M) onto nipple (N) and tighten to secure glass assembly.
7. Restore electricity at main breaker.

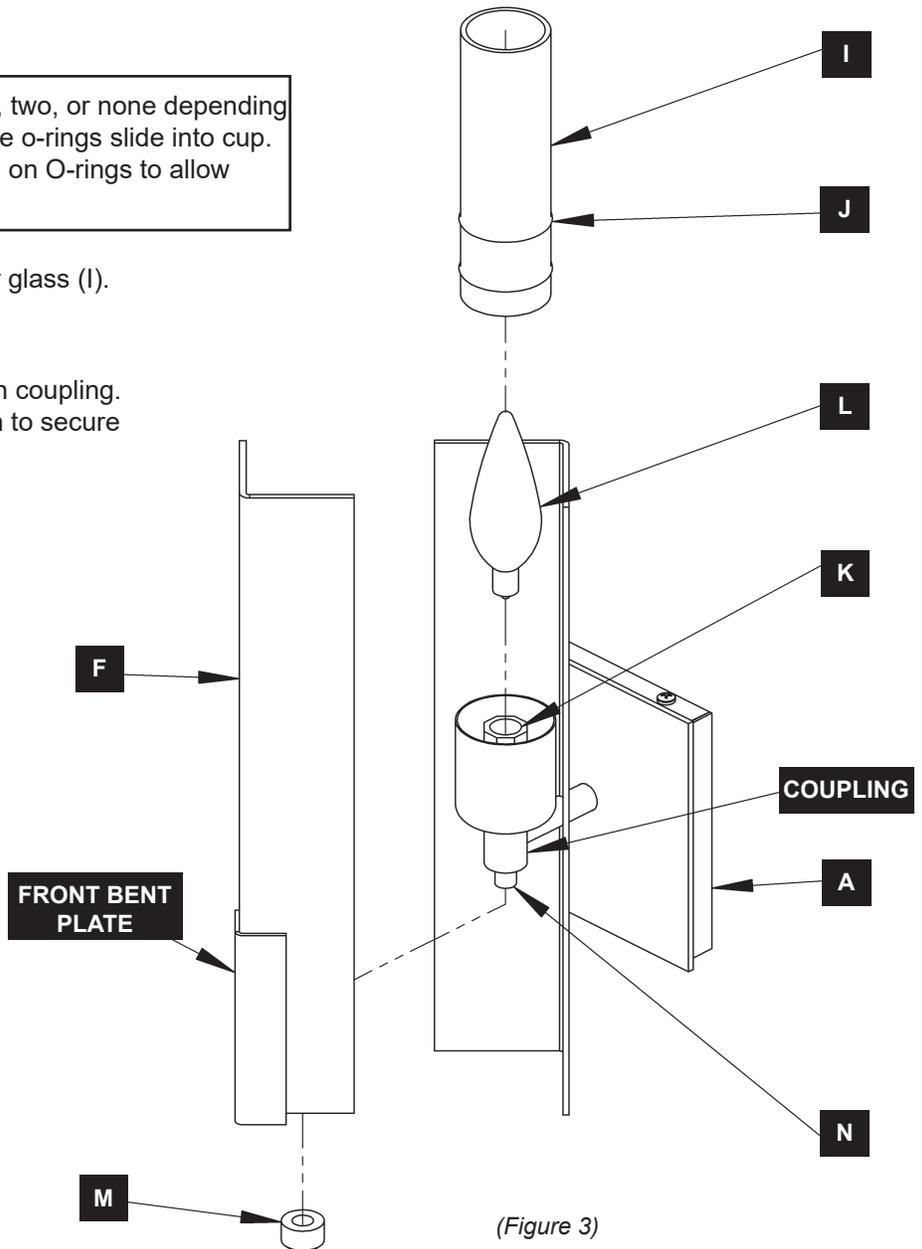

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.*