


ASSEMBLY & INSTALLATION INSTRUCTIONS

B544

Glissade Bath Bar 202222

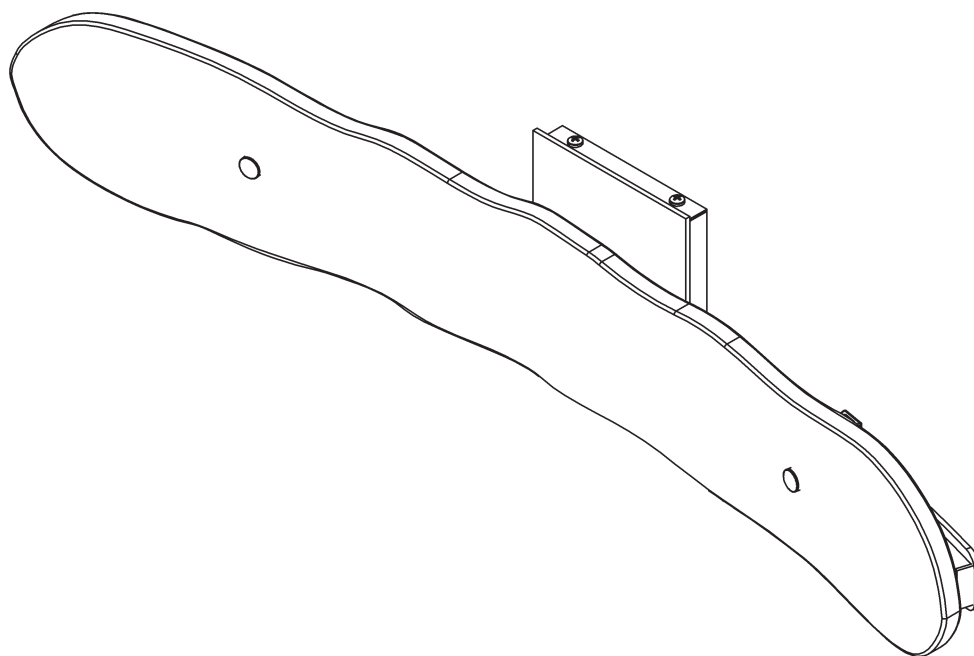

Component Parts

- A Fixture**
- B Mounting Bracket**
- C Ground Screw**
- D Cupped Washer**
- E #8 Screws (4)**
- F Driver**
- G Glass Bracket (2)**
- H Thumb Screw Short (2)**
- I Thumb Screw Long (2)**
- J Black Rubber Washer (2)**
- K Glass**
- L XL Thumb Screw (2)**

ASSEMBLY & INSTALLATION INSTRUCTIONS

B544

Glissade Bath Bar 202222

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.

To Install Fixture (Figure 1)

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack the fixture (A) from the carton.
2. Hold driver (F) close to wall. Using suitable wire connectors (not provided) connect driver wires to supply wires (white to white and black to black).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY AND NO BARE WIRE IS EXPOSED.

3. Push driver (F) into electrical box with wires w/ connectors facing out.
4. Remove mounting bracket (B) from fixture (A).
5. Place mounting bracket (B) over electrical box and secure with two machine screws (not provided).

Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use.


6. Attach a pigtail lead to mounting bracket (B) using ground screw (C) and cupped washer (D) found in kit bag.
7. Hold fixture (A) close to wall. Using wire connectors provided, connect driver (F) wires to LED wires (red to red and blue to blue). Connect all ground wires (bare copper or green to bare copper or green).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

8. Place fixture (A) over mounting bracket (B). Secure with #8 screws (E) on top and bottom of fixture.

CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN THE FIXTURE AND THE WALL.

9. Follow steps on following page to complete installation.

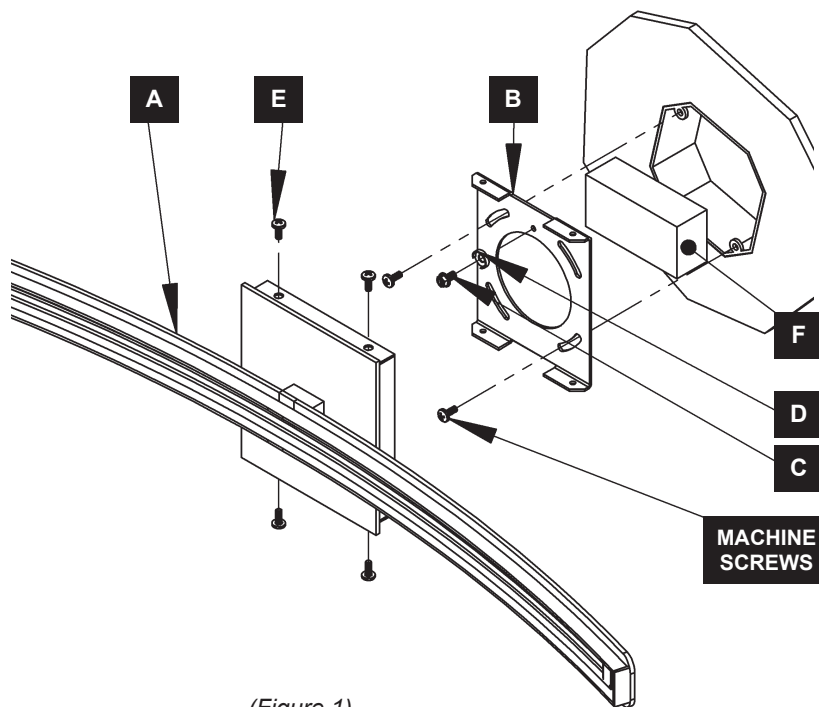

(Figure 1)




HUBBARDTON FORGE.

To Install Glass (Figure 2)

1. Carefully unpack glass (K).
2. Locate remaining parts in kit bag. Slide one glass bracket (G) over fixture (A).
3. Lift glass (K) up to glass bracket (G), align holes and secure with rubber washer (J) and thumb screw long (I).
4. Slide remaining glass bracket (G) over fixture (A), align with hole in glass (K) and secure with remaining rubber washer (J) and thumb screw long (I).

Note: *XL thumb screws (L) are also supplied in kit bag incase glass (K) is too thick for thumb screws long (I).*

5. Center glass (K) on fixture (A). Thread thumb screws short (H) into the top hole on glass brackets (G). Tighten to fixture to secure glass in place.
6. Restore electricity at main breaker.

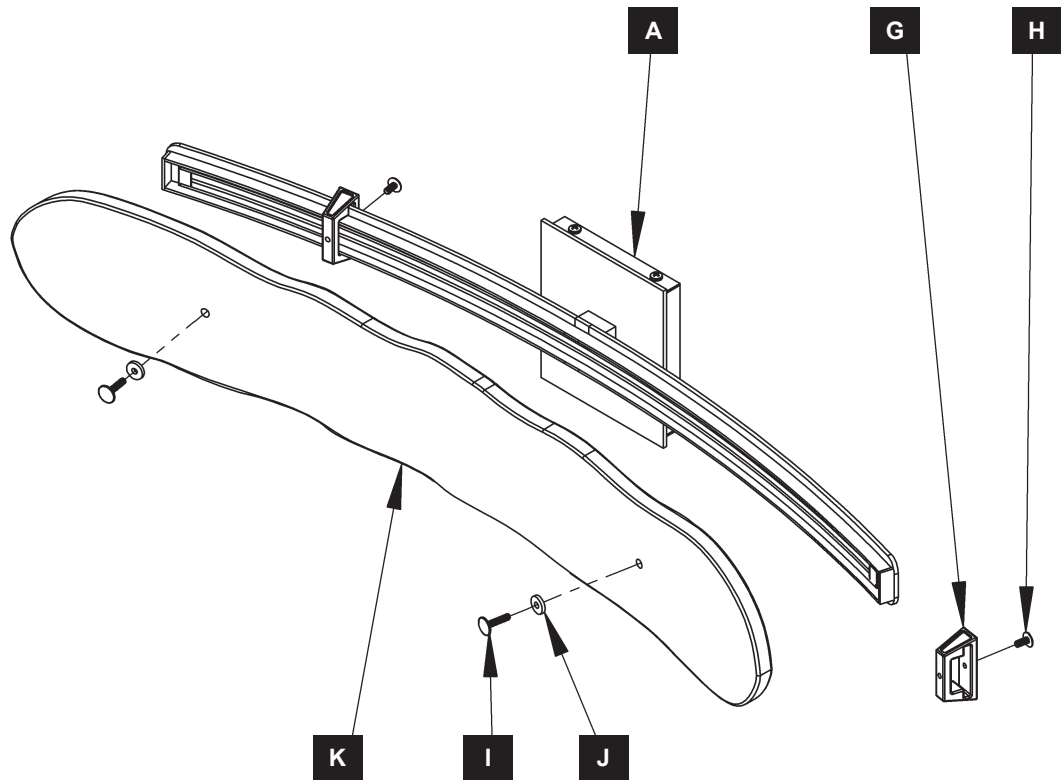

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

*** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**