


# ASSEMBLY & INSTALLATION INSTRUCTIONS

**B575**

302026 Outdoor Linea Sconce Large

---

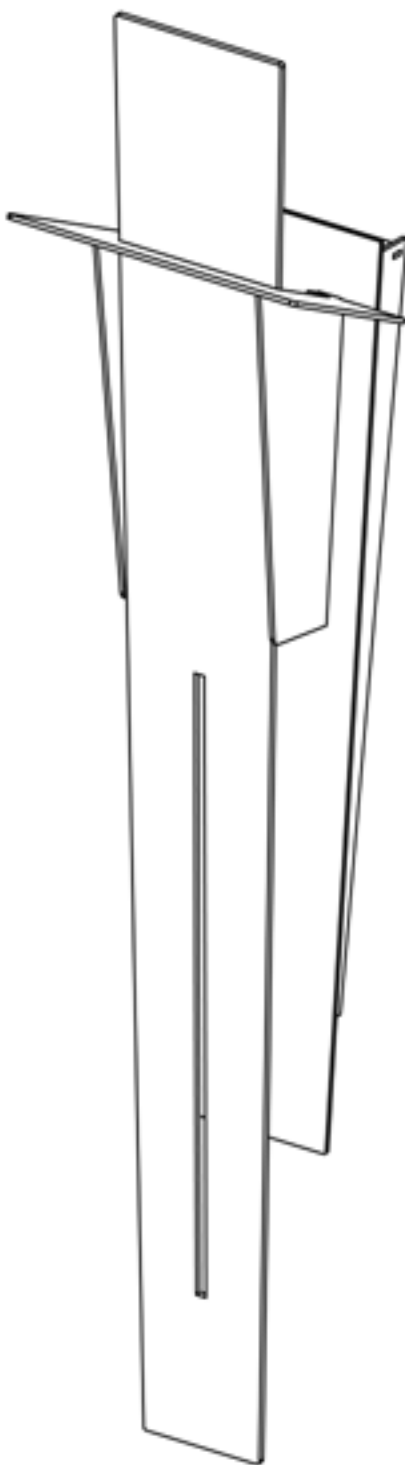

## Component Parts

- A     Fixture**
- B     Front Plate Assembly**
- C     #8 Screw (2)**
- D     Screw Washer (2)**
- E     Can Screw (4)**
- F     Fixture Can**
- G     Glass**
- H     LED Bulb (Not Provided)**
- I     Dark Sky Plate**
- J     Lower Plate**
- K     Fixture Stud (2)**
- L     Rubber Washer (2)**
- M     Caulking Lip**
- N     Mounting Screws (2)**



## To Disassemble Fixture (Figure 1)

1. Carefully unpack the fixture (A) from the carton.
2. Remove #8 screws (C) and screw washers (D) from top of fixture.
3. Slide front plate assembly (B) up from fixture (A) until front plate disengages from fixture. Set front plate aside for later steps.
4. Unscrew can screws (E) from fixture (A).
5. Remove fixture can (F) from fixture (A).
6. Follow instructions on following pages for installation.

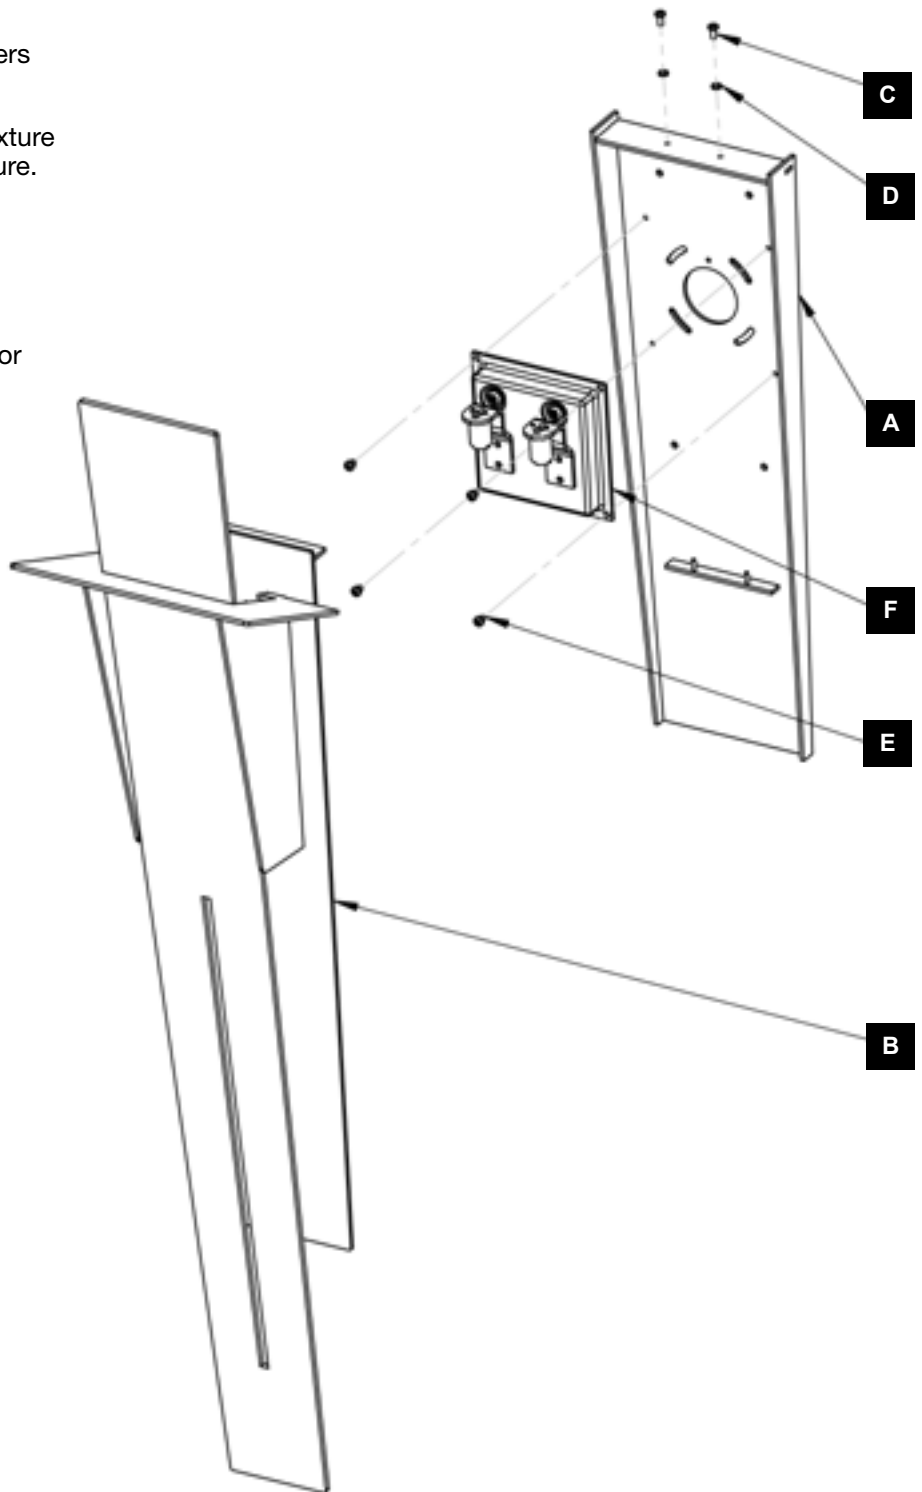


FIGURE 1



# ASSEMBLY & INSTALLATION INSTRUCTIONS

B575

302026 Outdoor Linea Sconce Large

**CAUTION:** FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.

## To Mount Fixture (Figures 2 and 3 - on next page)

**CAUTION:** BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Apply a generous bead of suitable caulking material (not provided) to caulking lip (M) in fixture (A). (Figure 3)
2. Place fixture (A) over the electrical box being sure to hold it level. Using two machine screws (not provided) fasten fixture (A) to the electrical box.

**NOTE:** A NEW ELECTRIC BOX COMES WITH SCREWS. WHEN REPLACING A FIXTURE, RETAIN THE EXISTING SCREWS FOR USE WITH THE NEW FIXTURE.

3. Hold fixture can (F) close to the electric box. Using suitable wire connectors (not provided) connect socket wires to supply wires (white to white and black to black). Connect all ground wires (bare copper or green to bare copper or green) together.

**CAUTION:** MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

4. While holding socket can (F) against fixture (A), screw in socket screws (E) to fixture to secure socket can.

**CAUTION:** BE SURE NO WIRES ARE PINCHED BETWEEN THE WALL AND FIXTURE.

5. Follow instructions on following pages to complete installation



HUBBARDTON FORGE.

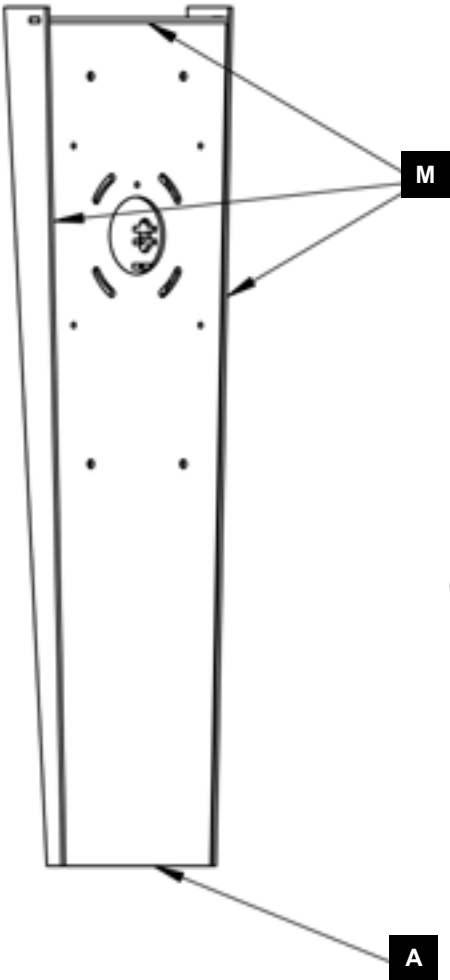


FIGURE 2



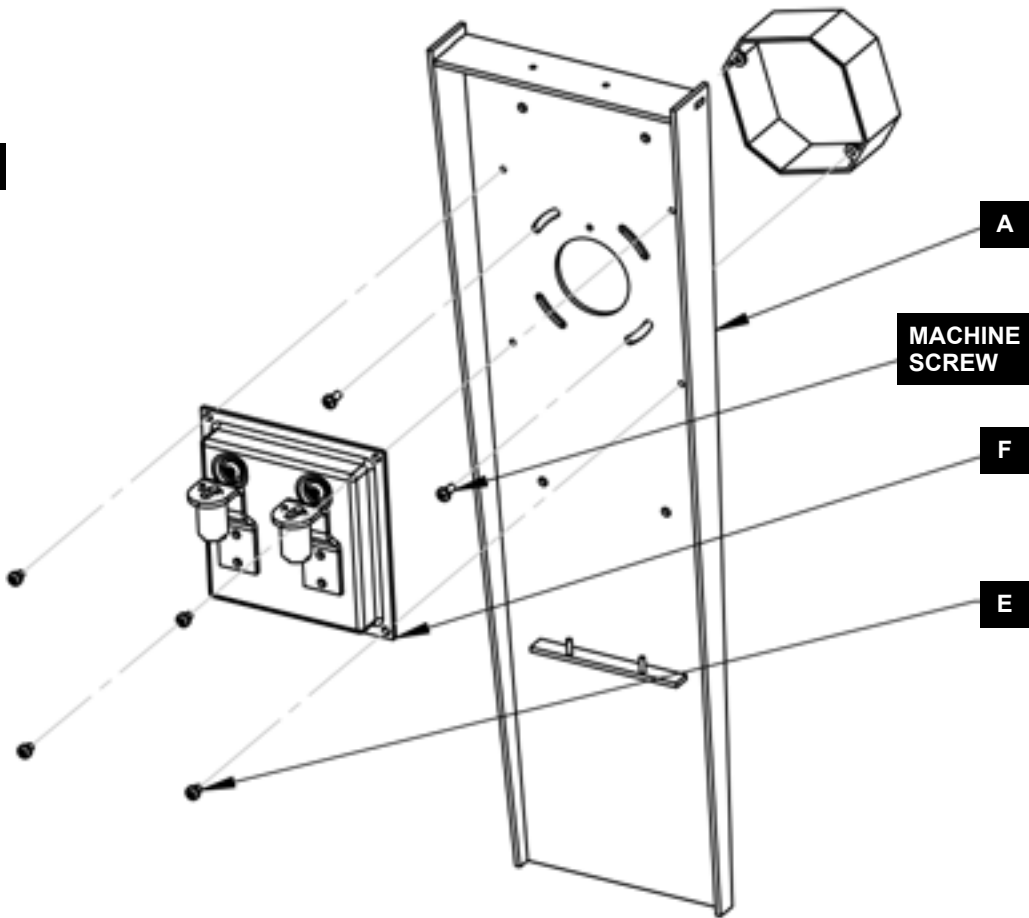


FIGURE 3

## To Install Glass and Bulbs *(Figures 4 and 5)*

1. Install LED bulbs (H) into sockets attached to fixture can (F). (Figure 5)
2. While tilting top of glass (G) away from fixture and making sure weep hole is facing down (Figure 5), slide bottom portion of glass (G) over bottom bulb (H).
3. Raise glass (G) up until top can tilt over top bulb (H). Slide glass down to engage with washer on fixture (A).
4. Follow instructions on following page to complete install.

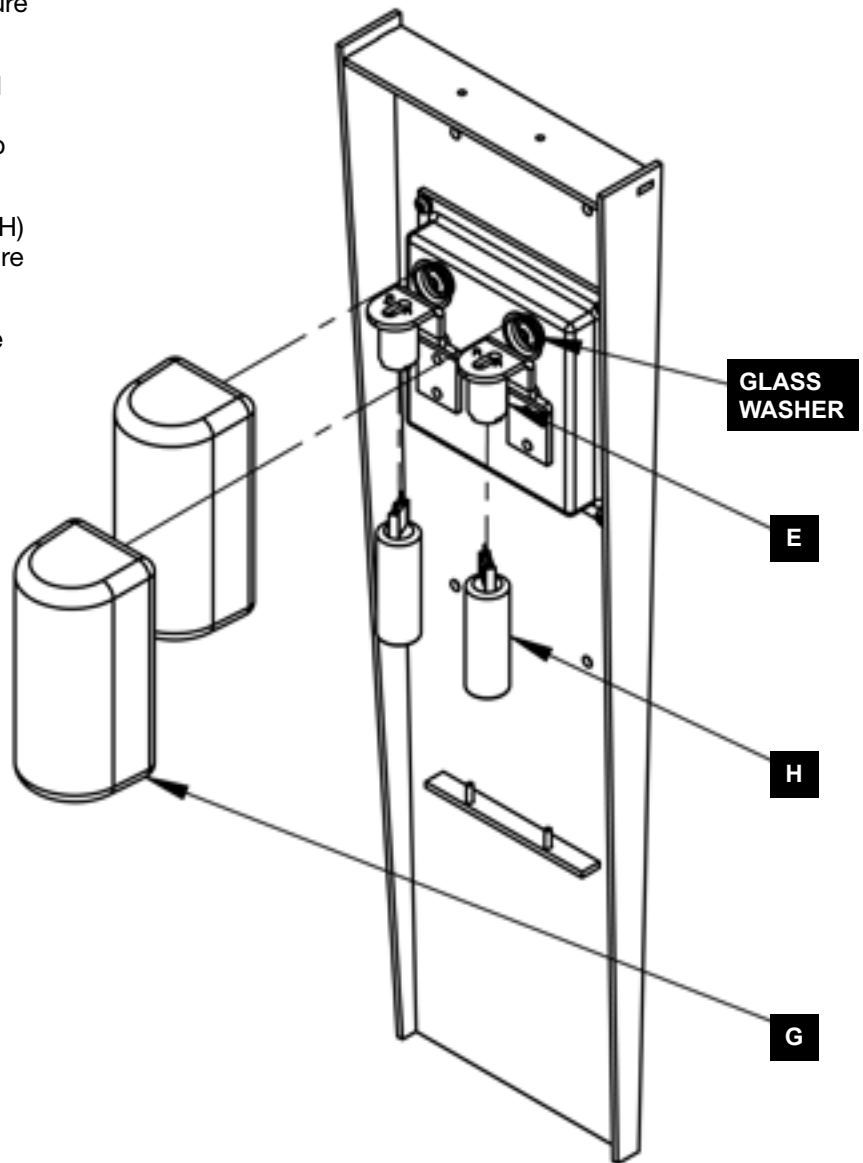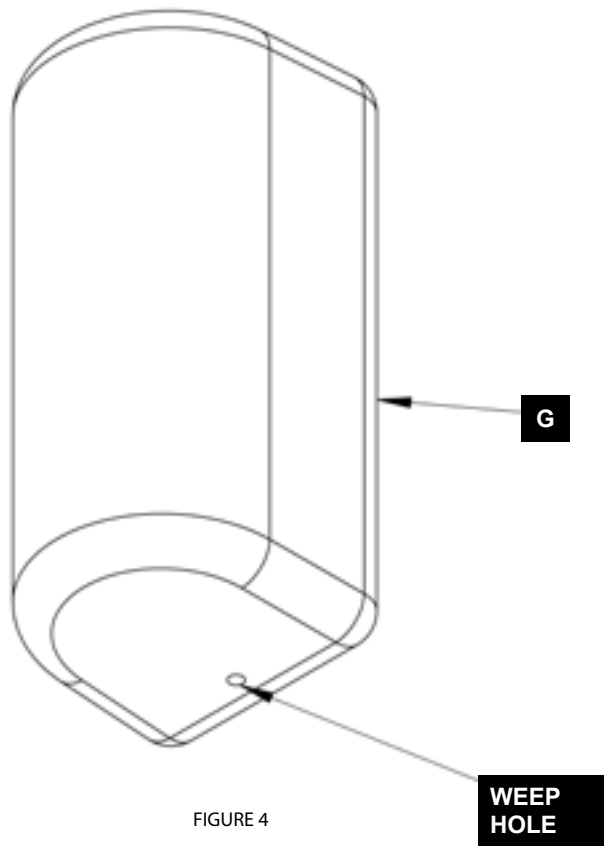

## To Complete Install *(Figures 6 and 7)*

1. If dark sky is not desired, unscrew mounting screws (N) from front plate assembly (B) and remove dark sky plate (I)
2. Slide holes in lower plate (J) on front plate assembly (B) over fixture studs (K).
3. Thread #8 screws (C) and rubber washers into top of fixture (A) to secure front plate assembly (B).
4. Restore electricity at main breaker.

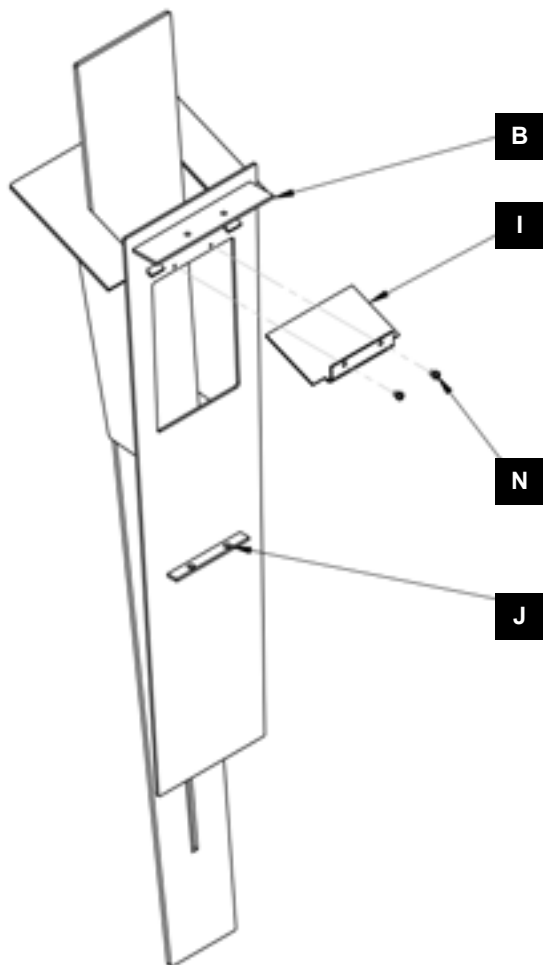


FIGURE 6

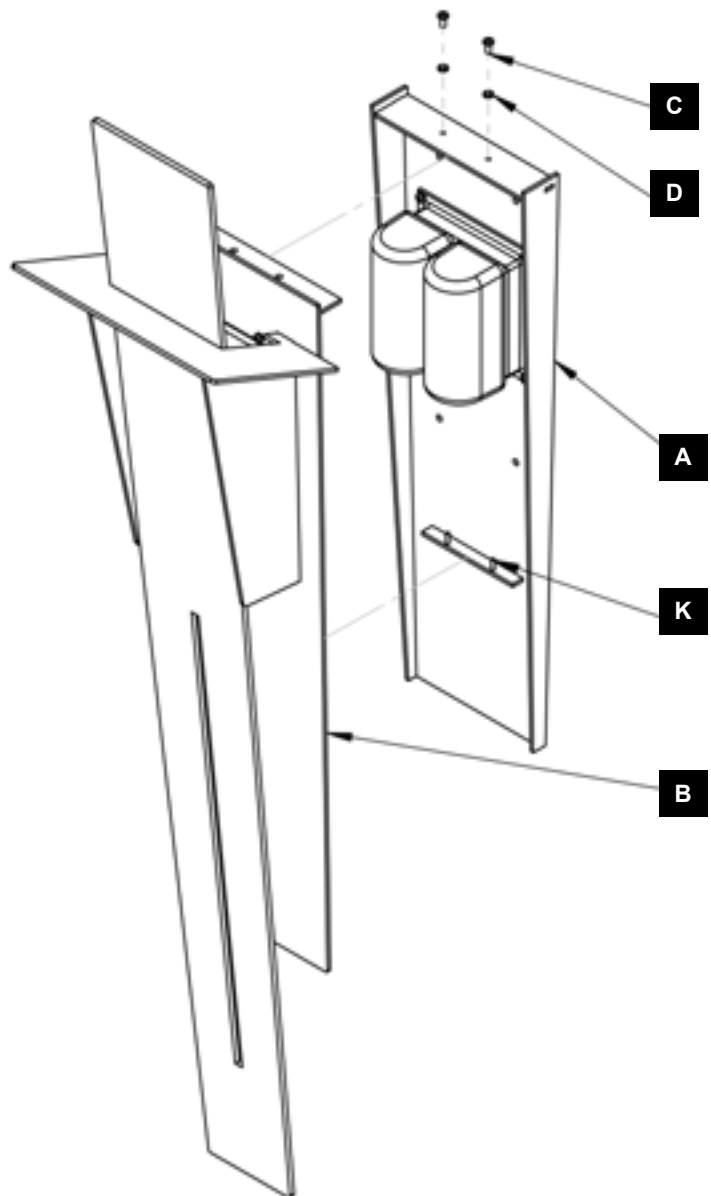


FIGURE 7

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

**\* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**



HUBBARDTON FORGE.