


ASSEMBLY & INSTALLATION INSTRUCTIONS

B392

Vela Sconce 203330

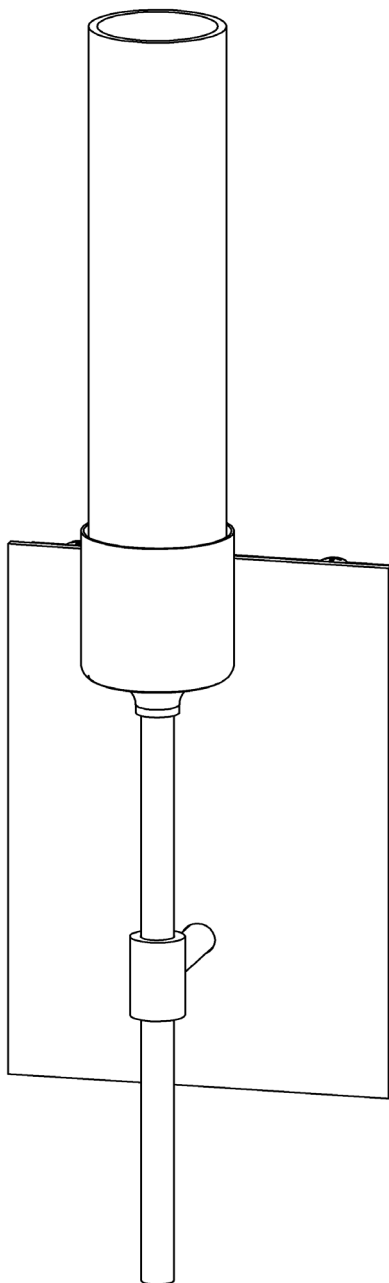

HUBBARDTON FORGE.

Component Parts

- A Fixture**
- B Mounting Bracket**
- C Anchors (4)**
- D #10 Screws (4)**
- E Ground Screw**
- F Cupped Washer**
- G #8 Screws (4)**
- H Socket**
- I B10 Type Bulb (Not Included)**
- J Glass**
- K O-Ring**
- L Socket Cup**



ASSEMBLY & INSTALLATION INSTRUCTIONS

B392

Vela Sconce 203330

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*


Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.

To Install Fixture (Figure 1)

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack the fixture (A) from the carton.
2. Take off rubber band and remove mounting bracket (B) from fixture (A).
3. Place the mounting bracket (B) over the electrical box being sure to hold it level. Line up holes in mounting bracket with holes in electrical box. With a pencil, mark the location of all mounting holes in the mounting bracket on the wall behind. Set bracket aside.
4. Drill 1/4" holes in the locations marked on the wall. Place the tapered end of the anchors (C) into the holes and gently tap them flush to the wall using a light weight hammer.
5. Thread the wires in the electrical box through the hole in the mounting bracket (B) while moving the bracket into position. Using #10 screws (D), screw the mounting bracket securely to the wall. Be careful not to over-tighten or strip the anchors (C).
6. Attach a pigtail lead to the mounting bracket (B) using the ground screw (E) and cupped washer (F) found in kit bag.
7. Hold fixture (A) close to wall. Using suitable wire connectors (not provided), connect fixture wires to supply wires (white to white and black to black). Connect all ground wires (bare copper or green to bare copper or green).

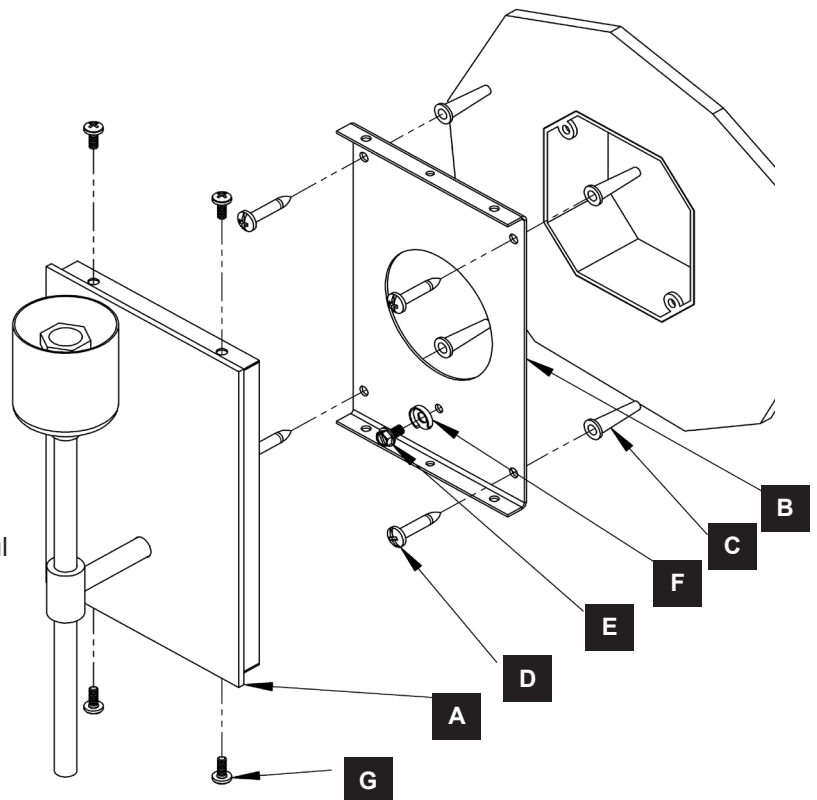

(Figure 1)

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

8. Place fixture (A) over mounting bracket (B). Secure with #8 screws (G) on top and bottom of fixture. Be sure no wires are pinched between fixture and wall.
9. See following page to complete installation.

Vela Sconce 203330

To Install Glass (Figure 2)


1. Unpack glass (J) and locate o-ring (K), found in kit bag.
2. Stretch o-ring (K) over one end of glass (J). Leave just slightly up from bottom of glass (See figure 2).
3. Install B10 type bulb (I) (not included) into socket (H) .
4. Place glass (J) over the B10 type bulb.

Note: All glass tolerance is designed for the recommended B10 type bulb. If a piece does not fit, verify correct bulb type and size is being used.

5. Slide glass (J) and o-ring (K) into socket cup (L) until it hits bottom of cup.

Note: O-rings are optional, and can either use one, two, or none depending on what's needed to help with gaps. Be sure O-rings slide into cup. It may be necessary to rotate glass or push on O-rings to allow them to slide into cup evenly.

6. Restore electricity at main breaker.

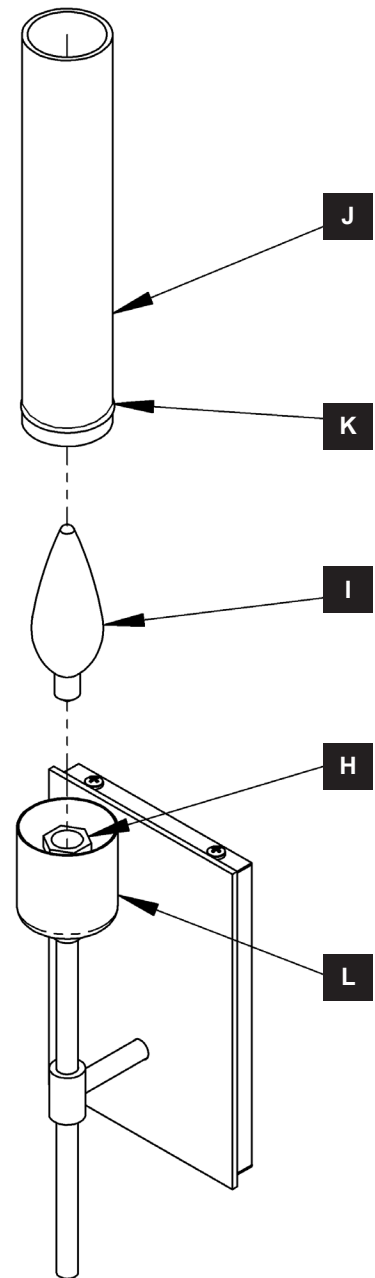

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

*** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**